



# SHOXS

## **5605 SEAT INFOSET**







## 5605 SEAT OVERVIEW

Human Engineering Reference MIL-STD-1472G

Suspension Travel 254 mm / 10 in

Material Aluminum 316 SS

Base Weight 22.3 kg / 49.2 lb

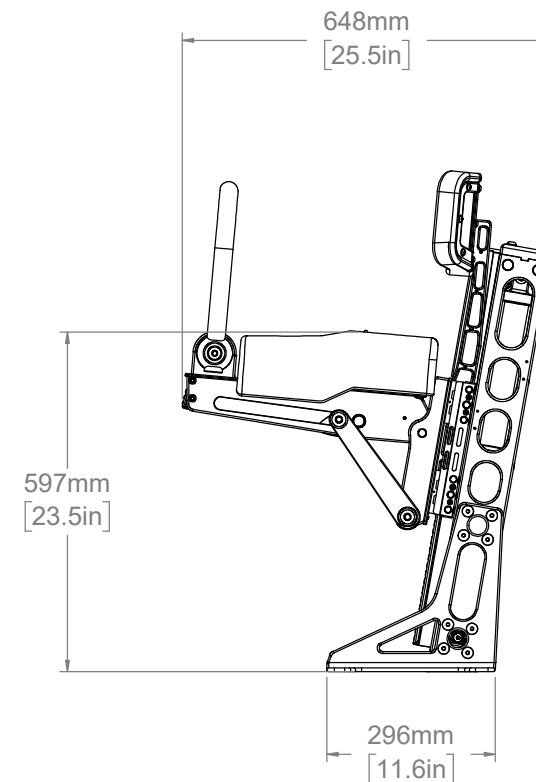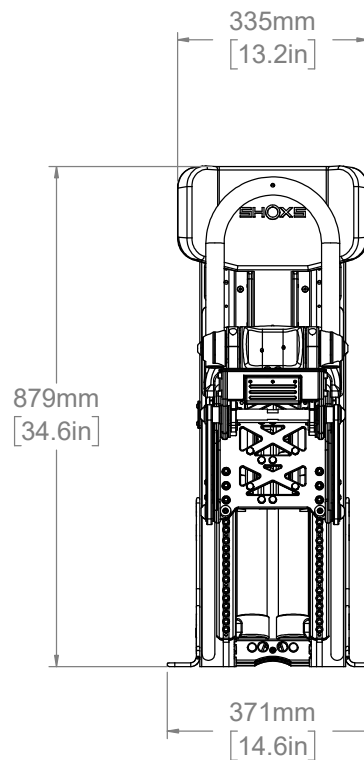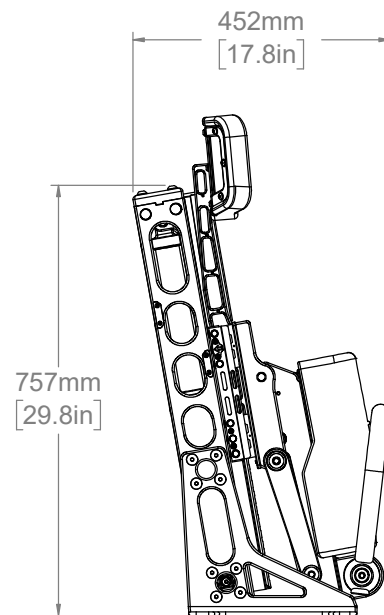



## 5605 SEAT CENTER OF MASS


Human Engineering Reference MIL-STD-1472G

Suspension Travel 254 mm / 10 in


Material Aluminum 316 SS

Base Weight 22.3 kg / 49.2 lb

MASS OF SEAT	22.3KG (49.2LBS)
MASS OF 95TH PERCENTILE MALE	97.2KG (213.8LBS)
TOTAL MASS	119.5KG (263.0LBS)

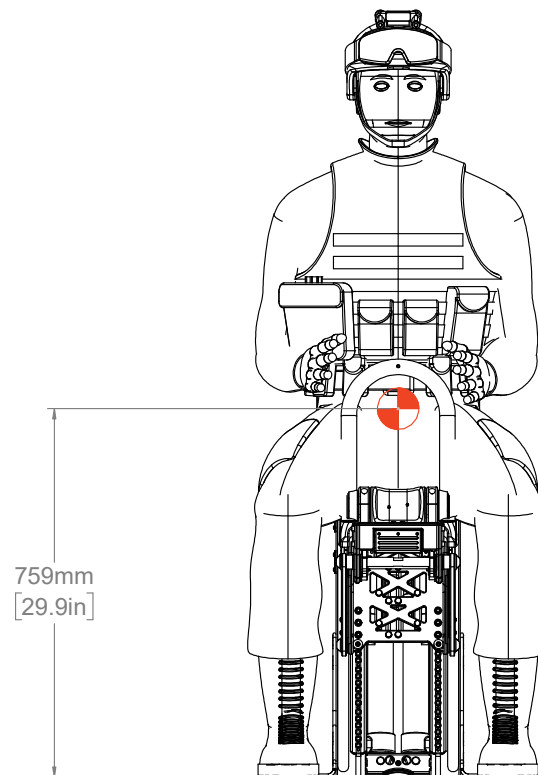

 CENTER OF MASS

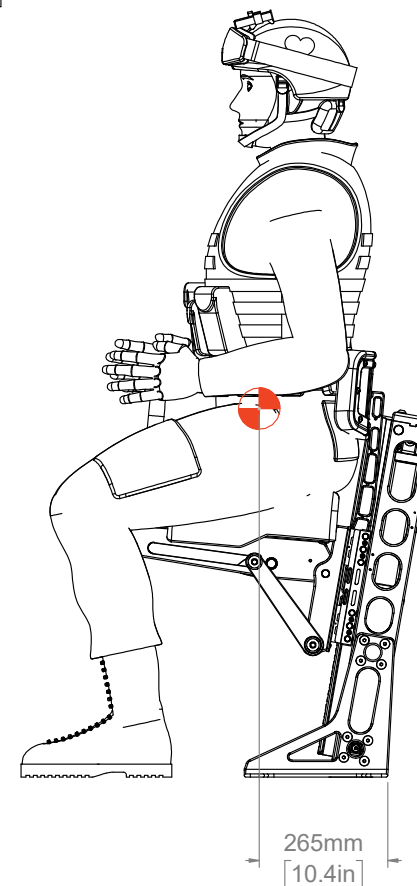

ALLSALT MARITIME OWNER OF SHOX5 AND KINETIX / ALLSALT.COM / SHOX5.COM / 1 (888) 637.4697




## 5605 SEAT SIGHTLINES

Human Engineering Reference MIL-STD-1472G

Suspension Travel 254 mm / 10 in

Material Aluminum 316 SS

Base Weight 22.3 kg / 49.2 lb

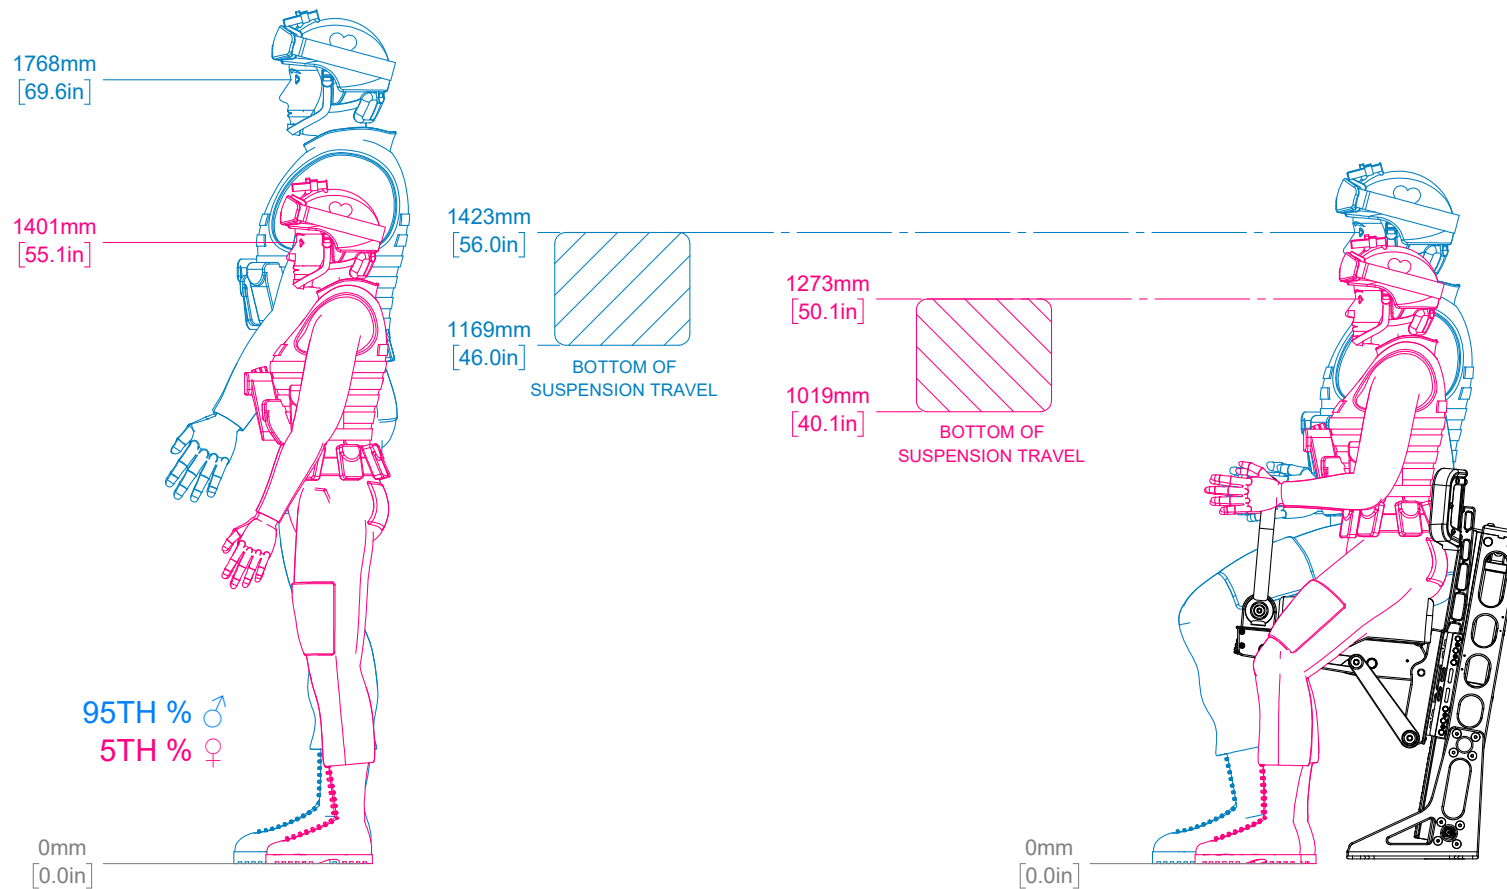




## 5605 SEAT CONSOLE ERGONOMICS

Human Engineering Reference MIL-STD-1472G

Suspension Travel 254 mm / 10 in

Material Aluminum 316 SS

Base Weight 22.3 kg / 49.2 lb

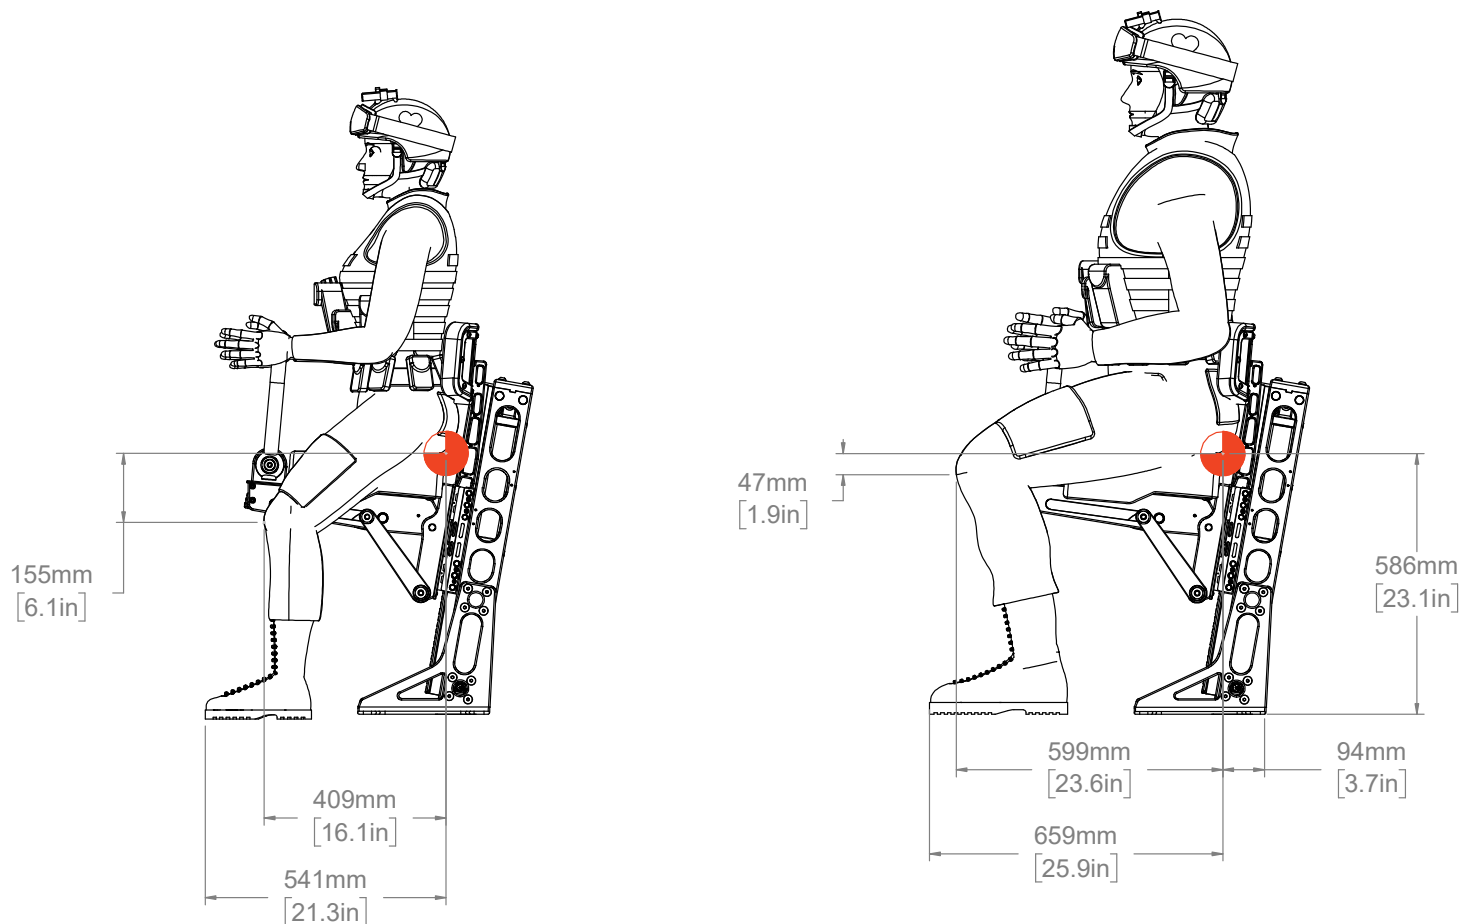

 SEAT REFERENCE POINT (SRP)

ALLSALT MARITIME OWNER OF SHOX5 AND KINETIX / ALLSALT.COM / SHOX5.COM / 1 (888) 637.4697





## 5605 SEAT SPACING

Human Engineering Reference MIL-STD-1472G

Suspension Travel 254 mm / 10 in

Material Aluminum 316 SS

Base Weight 22.3 kg / 49.2 lb

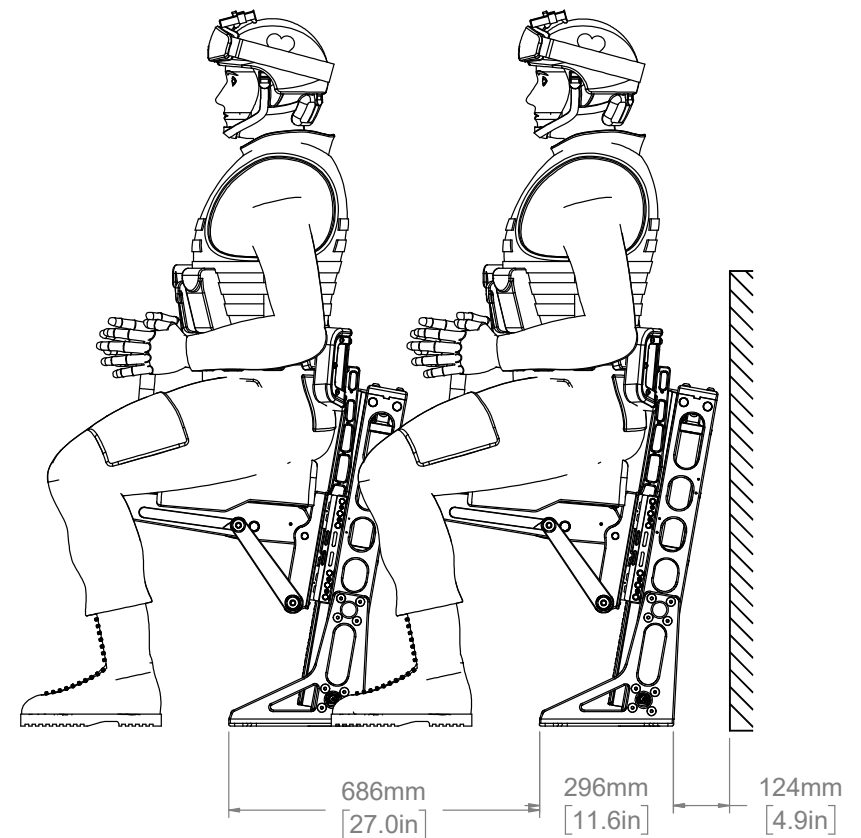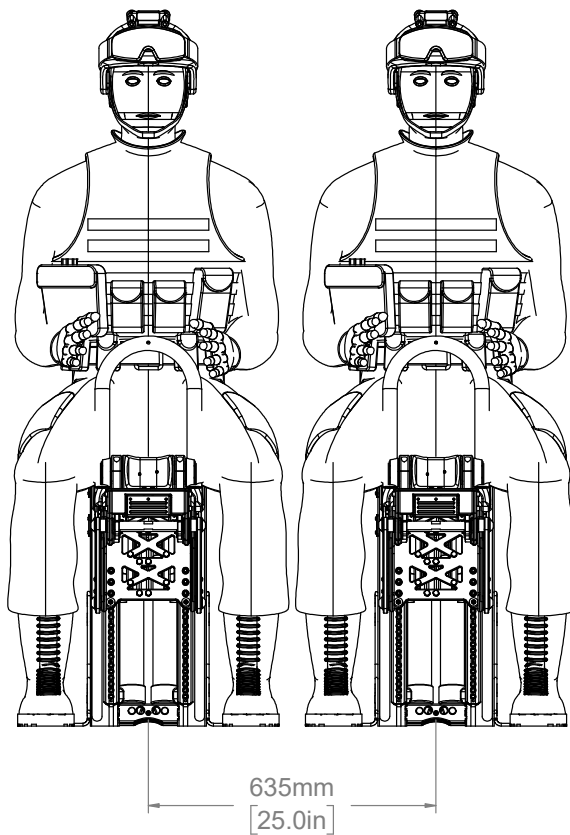

ALLSALT MARITIME OWNER OF SHOX5 AND KINETIX / ALLSALT.COM / SHOX5.COM / 1 (888) 637.4697