



SHOXS

5705 SEAT INFOSET




5705 SEAT OVERVIEW

Human Engineering Reference MIL-STD-1472G




Suspension Travel 254 mm / 10 in

Material Aluminum 316 SS

Base Weight 19 kg / 42 lb



254 mm
[10 in.]

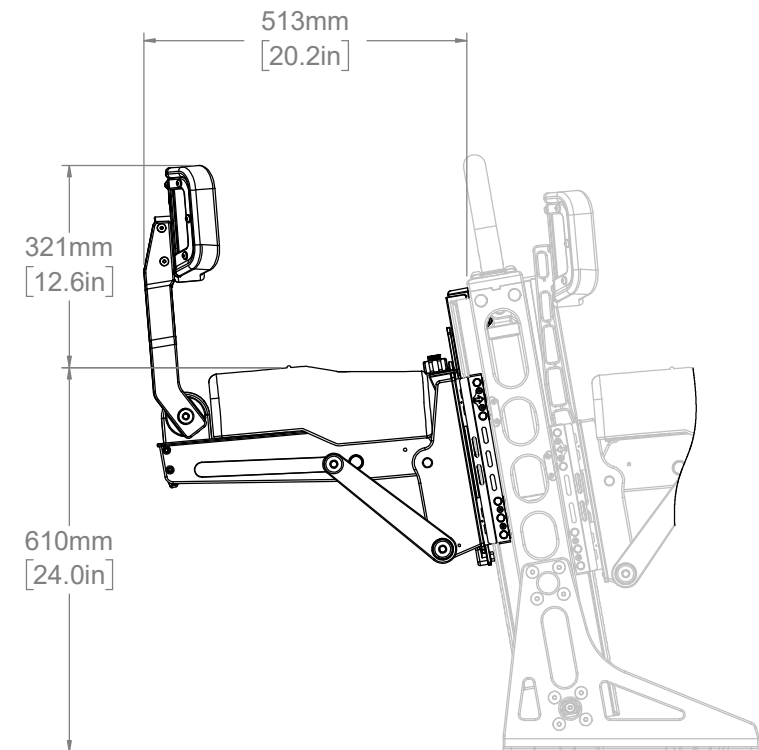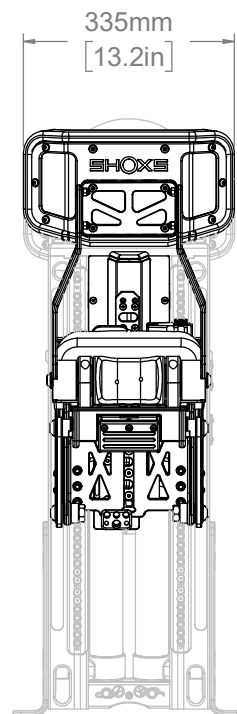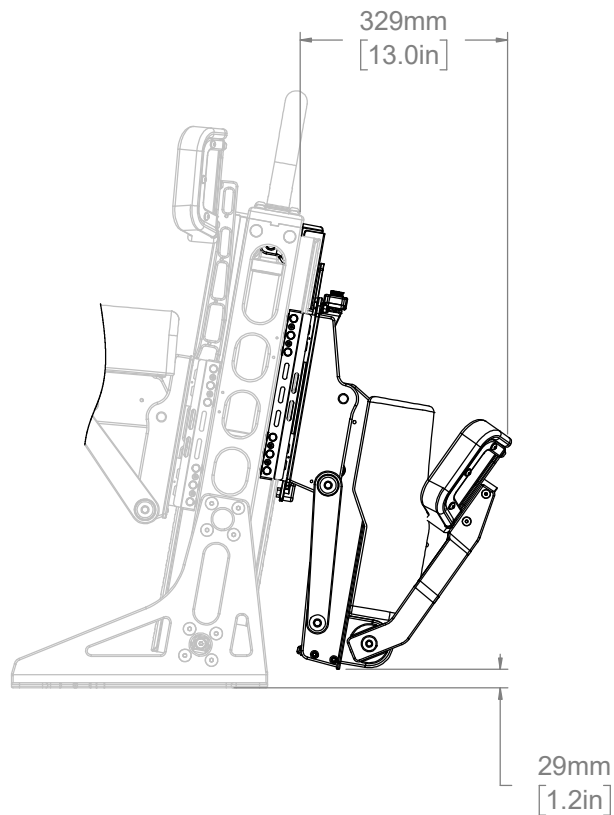




5705 SEAT CENTER OF MASS

Human Engineering Reference MIL-STD-1472G

Suspension Travel 254 mm / 10 in


Material Aluminum 316 SS

Base Weight 19 kg / 42 lb

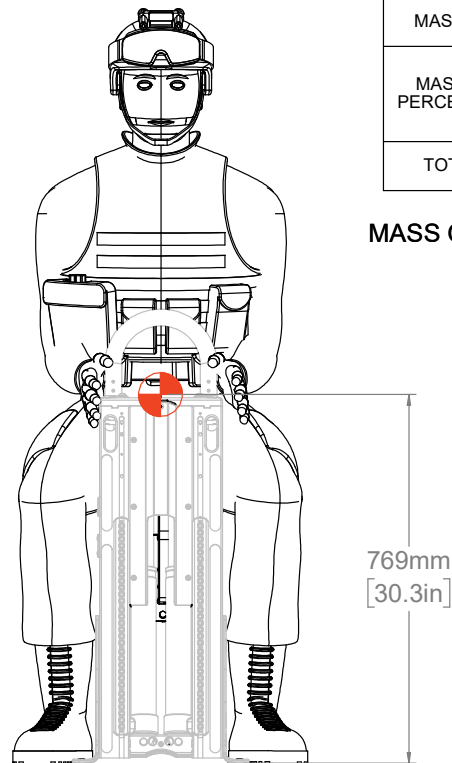

MASS OF SEAT	19 kg (42 lb)
MASS OF 95TH PERCENTILE MALE	97.2 kg (213.8 lb)
TOTAL MASS	116.2 kg (255.8 lb)

MASS OF **GREY** COMPONENTS
NOT INCLUDED

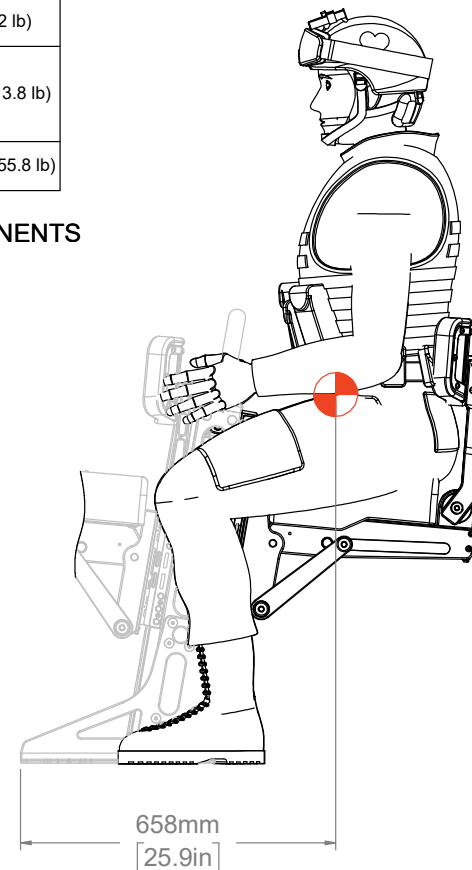

CENTER OF MASS




5705 SEAT SIGHTLINES

Human Engineering Reference MIL-STD-1472G

Suspension Travel 254 mm / 10 in

Material Aluminum 316 SS

Base Weight 19 kg / 42 lb

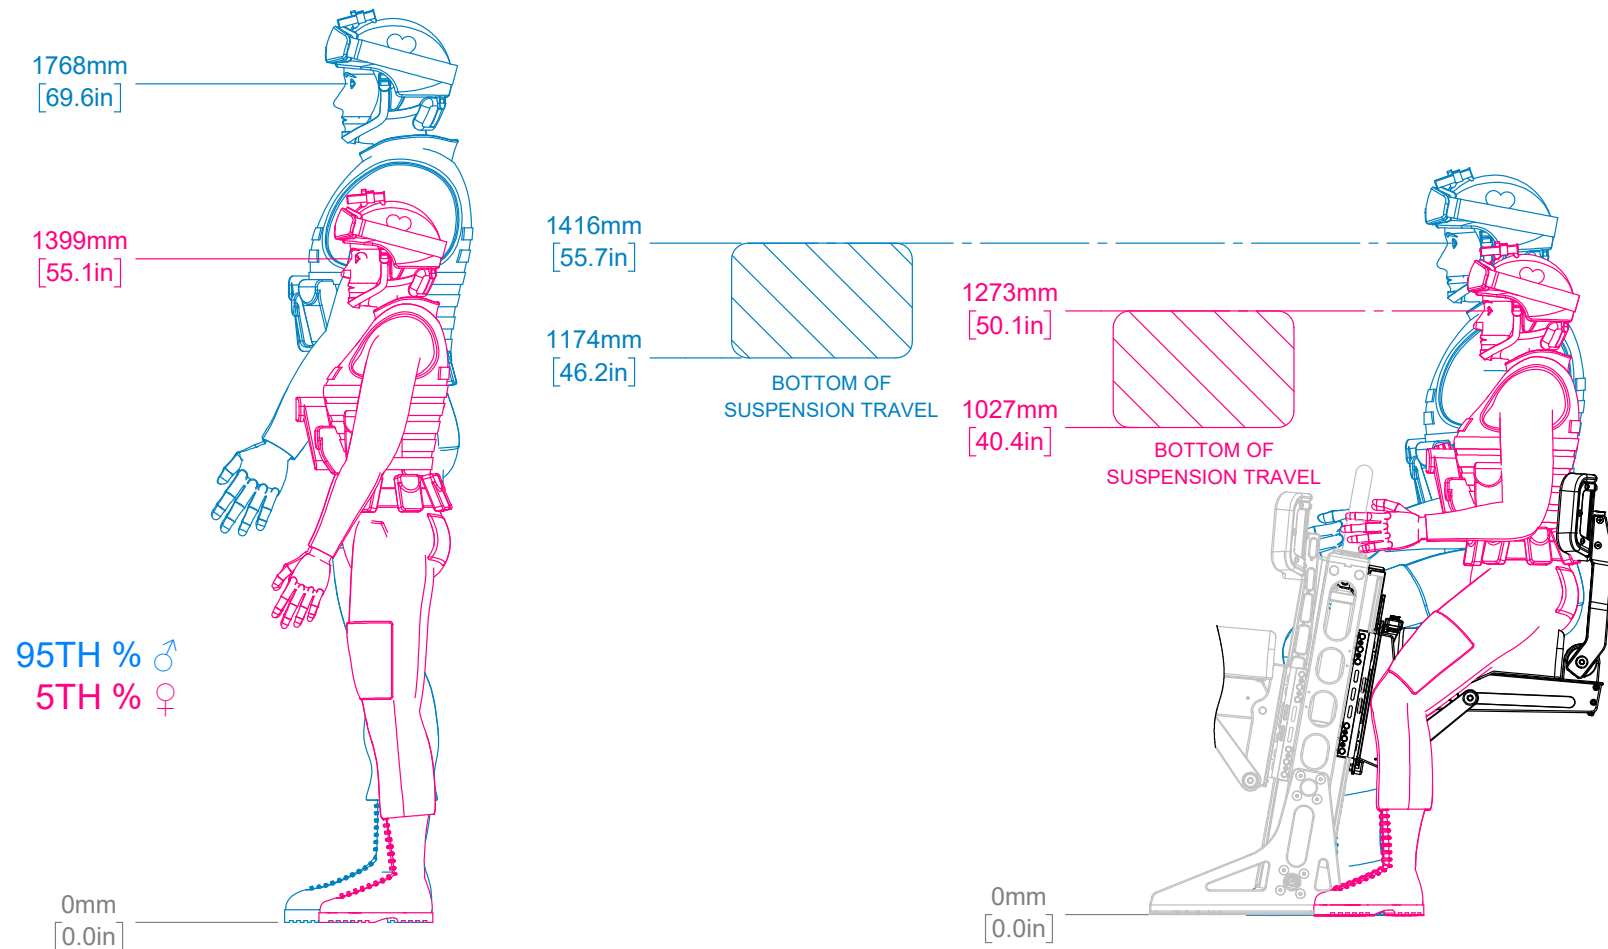

ALLSALT MARITIME OWNER OF SHOX5 AND KINETIX / ALLSALT.COM / SHOX5.COM / 1 (888) 637.4697





5705 SEAT CONSOLE ERGONOMICS

Human Engineering Reference MIL-STD-1472G

Suspension Travel 254 mm / 10 in

Material Aluminum 316 SS

Base Weight 19 kg / 42 lb

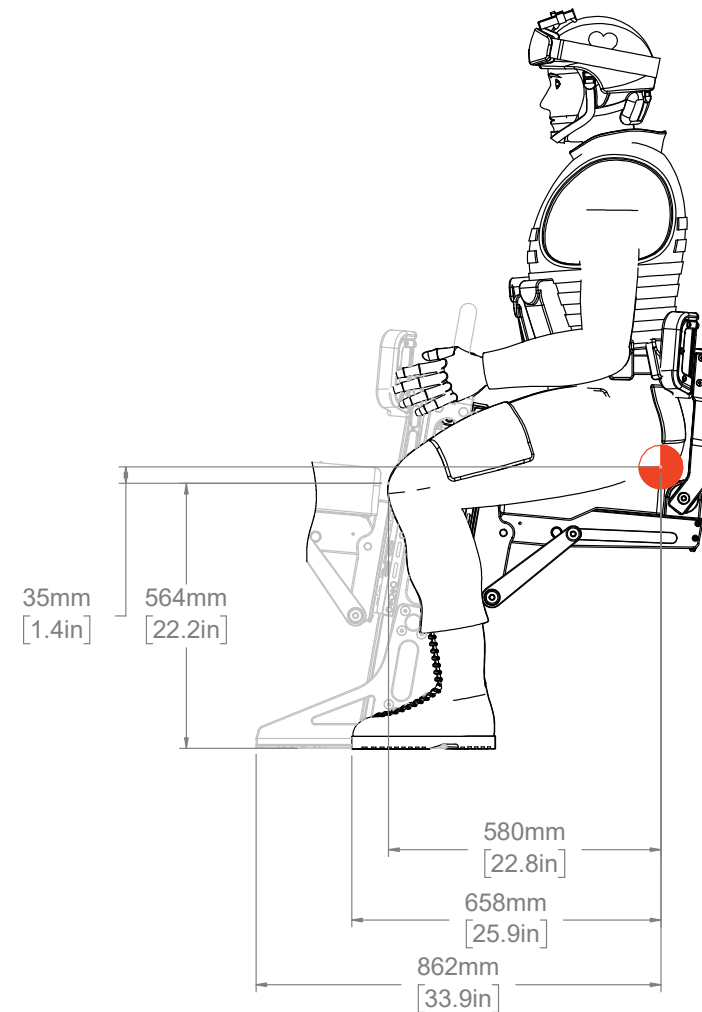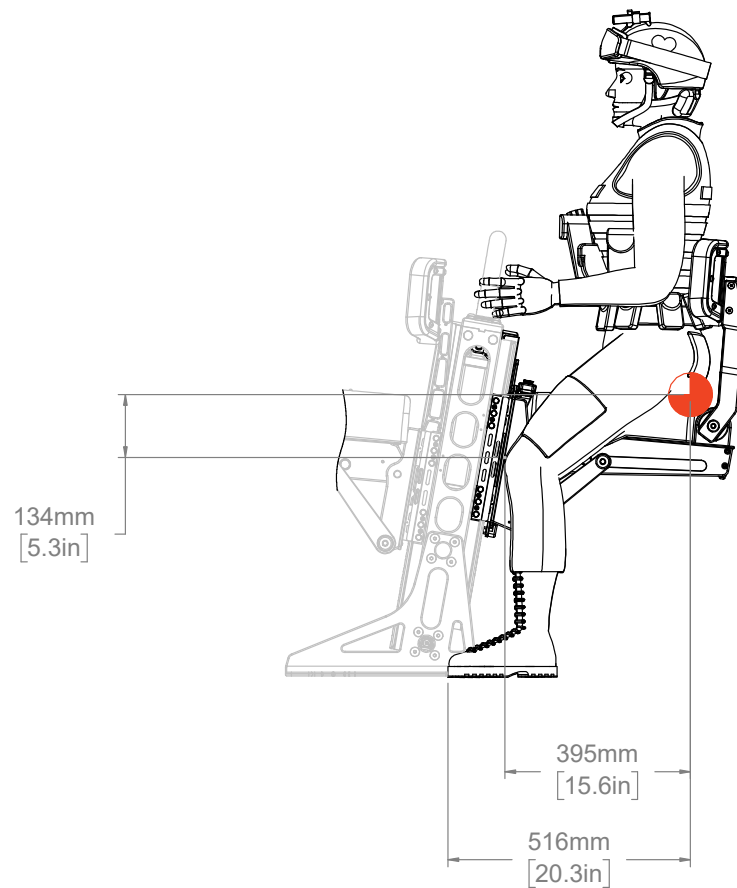

 SEAT REFERENCE POINT (SRP)

ALLSALT MARITIME OWNER OF SHOX5 AND KINETIX / ALLSALT.COM / SHOX5.COM / 1 (888) 637.4697



5705 SEAT SPACING

Human Engineering Reference MIL-STD-1472G

Suspension Travel 254 mm / 10 in

Material Aluminum 316 SS

Base Weight 19 kg / 42 lb

